



HPRi Series Single Phase 50 Hz Up to 110 kVA 220 Vac Output 220 VDC Modular Inverter System

The Philtek HPRi Modular Inverter System features both Expandable and Redundant capabilities

The System is comprised of:

Inverter Modules “Plug and Play”


- 5 KVA or 10 KVA output each
- High frequency PWM technology, quiet operation
- Parallel connected with automatic load sharing
- “Hot Pluggable”, allows addition or removal of modules without de-energizing the system
- Output compatible with Active Power Factor Corrected AC Loads

Static Bypass Switch and Controller

- 2 mSec transfer time
- Microprocessor Controlled with LCD display and Industrial style LED Mimic Diagram
- User configured to operate in the On-line (Inverter preferred) or the Off-line (AC line preferred) mode
- Provides an additional level of redundancy when operated in the On-line Mode
- Plug in modular construction, can be removed or installed with no output interruption during Maintenance Bypass
- Optional RS-232 Communication Port available

AC Power Plant

- Constructed of heavy duty 23” Racks
- Make Before Break Maintenance Bypass Switch provides uninterrupted output during bypass
- AC line Circuit Breaker for overload protection during Static Bypass
- Fully enclosed AC and DC power bus bars, pre-wired to terminal blocks for external connections, simplifies installation
- Docking tray provides easy plug-in and removal of Inverter Module, will accept either a 5 kVA or a 10 kVA module
- Compact design, 25 KVA system is only 24.5” x 29” in foot print and 84” in height

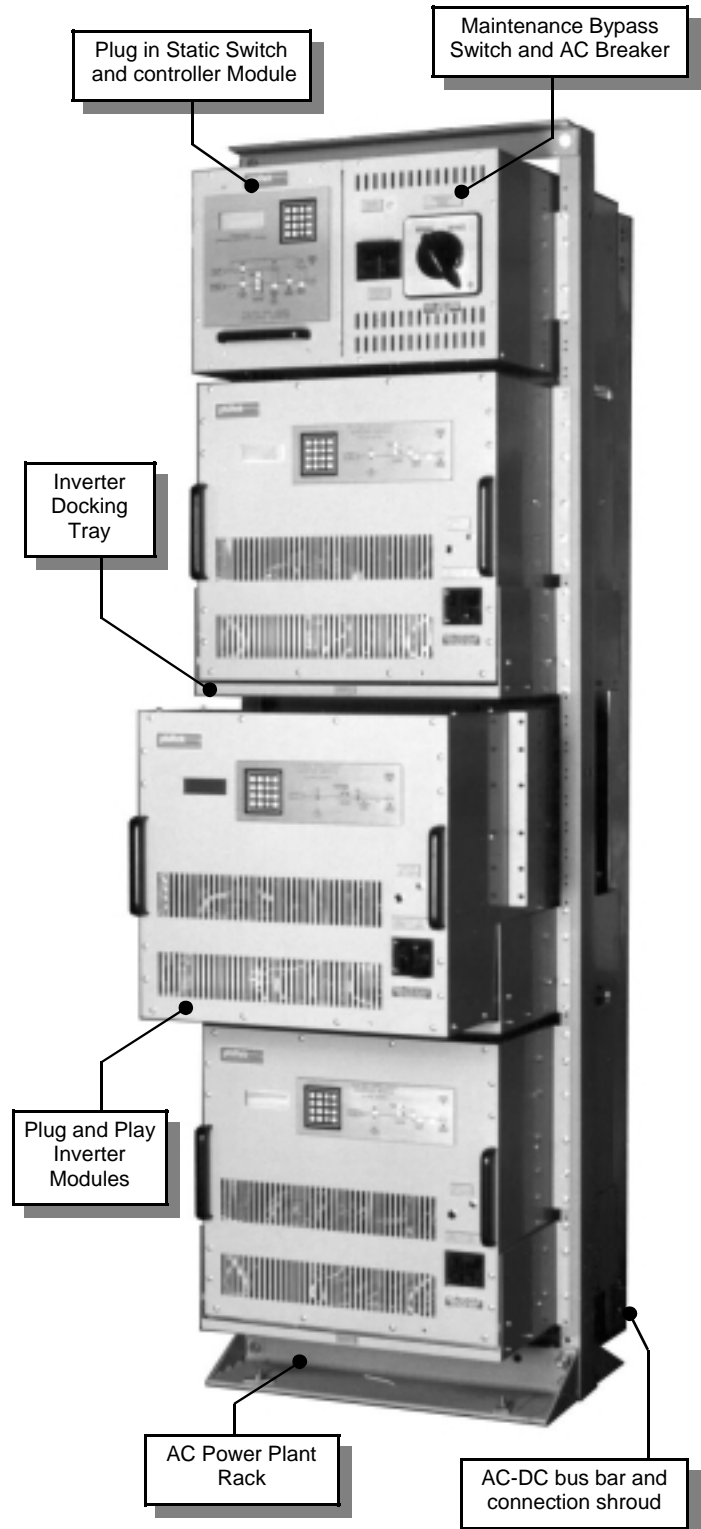

*Inverter System as shown above:
25 kVA Single Phase Output*

System Specifications (Subject to change without notice)

DC Input

Nominal	220 V
Range	196 to 267 V
Current	See Table

Inverter System AC Output

Power	See Table
Connection	2 wires + Gnd
Voltage	220 V
Regulation	± 1%
Dynamic:	
100 % step load	± 4%
Recovery	< 10 mSec
Efficiency	91 %
Distortion (linear load)	< 1.0 % THD
Non Linear Load Capability	Up to 100 %
Active P.F. Corrected Loads	Compatible
Load Power Factor (PF)	1.0
Frequency	50 Hz
Frequency Tolerance	± 0.1 % free running
Synchronization:	
Range	± 1.5 Hz
Rate	1 Hz per Sec

Bypass AC

Connection	2 wires + Gnd
Voltage	220 V
Phase	Single
Frequency	50 Hz

Static Bypass Switch

Transfer Time	2.5 mSec typical 5 mSec maximum
Voltage Tolerance	± 10 %
Frequency Tolerance	± 1.5 Hz
Overload:	120 % for 10 Minutes 1000 % for 8 ms

Environmental

Temperature	0° C to 40° C
Humidity	95 % RH
Cooling	Forced Air with temperature Controlled Fans

Inverter Modules

Output	Model #
5 kVA	HPri-INV-5K-220-A
10 kVA	HPri- INV-10K-220-A

Inverter System 220 VDC Input 220 VAC 50 Hz Single Phase Output

Output VA @ 1.0 PF	25,000 VA	50,000 VA	110,000 VA
AC Power Plant + Controller Model #	HPri 25K-220-A	HPri 50K-220-A+RA	HPri 110K-220-A+4RA
Inverter Modules Required	1 x 5 KVA + 2 x 10 KVA	5 x 10 KVA	11 x 10 KVA
AC Output Current	114 Amp	228 Amp	500 Amp
DC Input Current @ 196 V	140 Amp	280 Amp	617 Amp
AC Power Plant Racks	1	2*	5*
Overall Dim. W"xD"xH"	24.5 x 29 x 84	49 x 29 x 84	122.5 x 29 x 84
Total Weight (Net) Lbs	1,300	2,351	5,212

N+1 Redundant System 220 VDC Input 220 VAC 50 Hz Single Phase Output

Output VA @ 1.0 PF	20,000 VA N+1	50,000 VA N+1	110,000 VA N+1
AC Power Plant + Controller Model #	HPri 25K-220-A	HPri 50K-220-A+RA	HPri 110K-220-A+4RA
Inverter Modules Required	3 x 10 KVA	6 x 10 KVA	12 x 10 KVA
AC Output Current	91 Amp	228 Amp	500 Amp
DC Input Current @ 196 V	140 Amp	280 Amp	617 Amp
AC Power Plant Racks	1	2*	5*
Overall Dim. W"xD"xH"	24.5 x 29 x 84	49 x 29 x 84	122.5 x 29 x 84
Total Weight (Net) Lbs	1,413	2,691	5,552

* AC Power Plant racks shipped as individual units

Ordering Information:

First determine your power requirement, then select the appropriate **AC Power Plant + Controller** and quantity of **Inverter Modules** from the above tables

For example:

40,000VA output requires

Qty 1	HPri 50K-220-A+RA
Qty 4	HPri-INV-10K-220-A

For more information please contact:

Canada & Internatioal	USA
Philtek Electronics Ltd.	Philtek Power Corp.
Tel: (604) 270-4642	Tel: (360) 332-7252
Fax: (604) 270-8343	Fax: (360) 332-7253

www.philtek.com

(Printed in Canada 0701)